

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




AB

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04R 1/02, 7/06	A2	(11) International Publication Number: WO 97/09840 (43) International Publication Date: 13 March 1997 (13.03.97)
(21) International Application Number: PCT/GB96/02140 (22) International Filing Date: 2 September 1996 (02.09.96) (30) Priority Data: 9517918.0 2 September 1995 (02.09.95) GB 9522281.6 31 October 1995 (31.10.95) GB 9606836.6 30 March 1996 (30.03.96) GB (71) Applicant (for all designated States except US): VERITY GROUP PLC (GB/GB); Stonehill, Huntingdon, Cambridgeshire PE18 6ED (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): AZIMA, Henry [CA/GB]; 3 Southacre Close, Chaucer Road, Cambridge CB2 2TT (GB). COLLOMS, Martin [GB/GB]; 22 Burgess Hill, London NW2 2DA (GB). HARRIS, Neil [GB/GB]; 9 Davey Crescent, Great Shelford, Cambridge CB2 5JF (GB). (74) Agent: MAGUIRE & CO.; 5 Crown Street, St. Ives, Cambridgeshire PE17 4EB (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published Without international search report and to be republished upon receipt of that report.

(54) Title: LOUDSPEAKERS COMPRISING PANEL-FORM ACOUSTIC RADIATING ELEMENTS

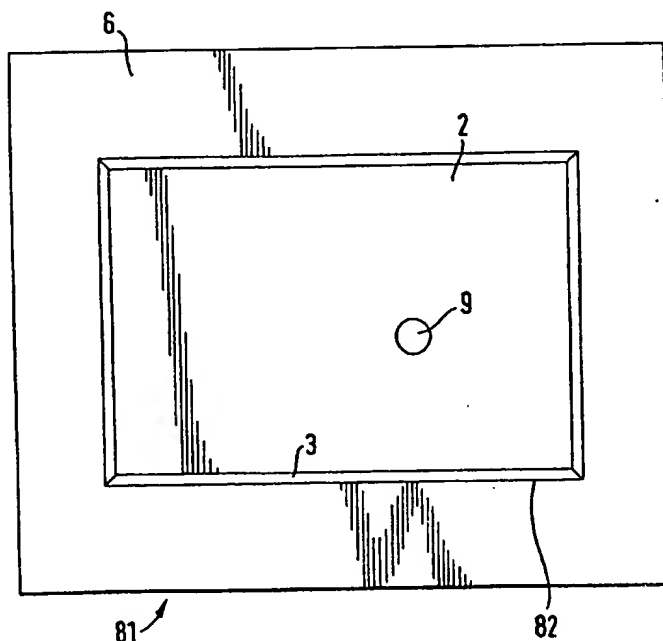

(57) Abstract

A panel-form loudspeaker (81) comprising a resonant distributed mode acoustic radiator (2), and drive means (9) mounted to the radiator to excite multi-mode resonance in the radiator, characterised by a baffle (6, 8) surrounding and supporting the radiator.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

5

TITLE:

LOUDSPEAKERS COMPRISING PANEL-FORM ACOUSTIC RADIATING ELEMENTS

10

DESCRIPTION

15

TECHNICAL FIELD

The invention relates to loudspeakers and more particularly to loudspeakers comprising panel-form acoustic radiating elements.

BACKGROUND ART

20

It is known from GB-A-2262861 to suggest a panel-form loudspeaker comprising:-

a resonant multi-mode radiator element being a unitary sandwich panel formed of two skins of material with a spacing core of transverse cellular construction, wherein
25 the panel is such as to have ratio of bending stiffness (B), in all orientations, to the cube power of panel mass per unit surface area (μ) of at least 10;

a mounting means which supports the panel or attaches

to it a supporting body, in a free undamped manner;

and an electro-mechanical drive means coupled to the panel which serves to excite a multi-modal resonance in the radiator panel in response to an electrical input within a
5 working frequency band for the loudspeaker.

DISCLOSURE OF INVENTION

Embodiments of the present invention use members of nature, structure and configuration achievable generally and/or specifically by implementing teachings of our co-
10 pending PCT application no. (our case P.5711) of even date herewith. Such members thus have capability to sustain and propagate input vibrational energy by bending waves in operative area(s) extending transversely of thickness often but not necessarily to edges of the member(s); are
15 configured with or without anisotropy of bending stiffness to have resonant mode vibration components distributed over said area(s) beneficially for acoustic coupling with ambient air; and have predetermined preferential locations or sites within said area for transducer means,
20 particularly operationally active or moving part(s) thereof effective in relation to acoustic vibrational activity in said area(s) and signals, usually electrical, corresponding to acoustic content of such vibrational activity. Uses are envisaged in co-pending International application No. (our
25 file P.5711) of even date herewith for such members as or in "passive" acoustic devices without transducer means, such as for reverberation or for acoustic filtering or for acoustically "voicing" a space or room; and as or in

"active" acoustic devices with transducer means, such as in a remarkably wide range of sources of sound or loudspeakers when supplied with input signals to be converted to said sound, or in such as microphones when exposed to sound to
5 be converted into other signals.

This invention is particularly concerned with active acoustic devices in the form of loudspeakers. Members as above are herein called distributed mode acoustic radiators and are intended to be characterised as in the above PCT
10 application and/or otherwise as specifically provided herein.

According to the invention a panel-form loudspeaker comprises a resonant multi-mode acoustic radiator, drive means mounted to the radiator to excite multi-mode
15 resonance in the radiator, and a baffle surrounding and supporting the radiator. A resilient suspension may be interposed between the radiator and the surround. The resilient suspension may be of an elastomeric material such as rubber and may be sponge-like, e.g. foamed rubber.

20 The baffle may be substantially planar or may be in the form of an enclosure, e.g. a box-like enclosure. The baffle may be of any suitable rigid material, e.g. medium density fibreboard. When the baffle is formed into an enclosure it may be of so-called 'infinite baffle' form or
25 may be ported.

The transducer may be mounted wholly and exclusively on the radiator.

The enclosure may comprise a rear box portion adapted

to be buried in a wall or the like surface and a front box portion adapted to project from the wall or the like. The radiator may comprise a lightweight core separating a pair of higher modulus lightweight skins.

- 5 A subwoofer, which may be a conventional cone driver, and/or a tweeter, which may be of known construction, may be mounted to the baffle.

BRIEF DESCRIPTION OF DRAWINGS

The invention is diagrammatically illustrated, by way
10 of example, in the accompanying drawings, in which:-

Figure 1 is a diagram showing a distributed-mode member as described and claimed in our co-pending International application No... (our case P.5711) of even date herewith;

- 15 Figure 2a is a partial section on the line A-A of Figure 1;

Figure 2b is an enlarged cross-section through a distributed mode radiator of the kind shown in Figure 2a and showing two alternative constructions;

- 20 Figure 3 is a diagram of a first embodiment of distributed-mode loudspeaker according to the present invention;

Figure 4a is a perspective view of a second embodiment of distributed-mode loudspeaker according to the present
25 invention;

Figure 4b is a partial cross-sectional view of the loudspeaker of Figure 4a;

Figure 5a is a perspective view of a third embodiment

of distributed-mode loudspeaker according to the present invention, and

Figure 5b is a partial cross-sectional view of the loudspeaker of Figure 5a.

5 BEST MODES FOR CARRYING OUT THE INVENTION

Referring to Figure 1 of the drawings, there is shown a panel-form loudspeaker (81) of the kind described and claimed in our co-pending International application No. (our case P.5711) of even date herewith comprising a
5 rectangular frame (1) carrying a resilient suspension (3) round its inner periphery which supports a distributed mode sound radiating panel (2). A transducer (9) e.g. as described in detail with reference to our co-pending International applications Nos. (our cases P.5683/4/5) of
10 even date herewith, is mounted wholly and exclusively on or in the panel (2) at a predetermined location defined by dimensions x and y , the position of which location is calculated as described in our co-pending International application No. (our case P.5711) of even date herewith,
15 to launch bending waves into the panel to cause the panel to resonate to radiate an acoustic output.

The transducer (9) is driven by a signal amplifier (10), e.g. an audio amplifier, connected to the transducer by conductors (28). Amplifier loading and power
20 requirements can be entirely normal, similar to conventional cone type speakers, sensitivity being of the order of 86 - 88dB/watt under room loaded conditions. Amplifier load impedance is largely resistive at 6 ohms,

power handling 20-80 watts. Where the panel core and/or skins are of metal, they may be made to act as a heat sink for the transducer to remove heat from the motor coil of the transducer and thus improve power handling.

5 Figures 2a and 2b are partial typical cross-sections through the loudspeaker (81) of Figure 1. Figure 2a shows that the frame (1), surround (3) and panel (2) are connected together by respective adhesive-bonded joints (20). Suitable materials for the frame include lightweight
10 framing, e.g. picture framing of extruded metal e.g. aluminium alloy or plastics. Suitable surround materials include resilient materials such as foam rubber and foam plastics. Suitable adhesives for the joints (20) include epoxy, acrylic and cyano-acrylate etc. adhesives.

15 Figure 2b illustrates, to an enlarged scale, that the panel (2) is a rigid lightweight panel having a core (22) e.g. of a rigid plastics foam (97) e.g. cross linked polyvinylchloride or a cellular matrix (98) i.e. a honeycomb matrix of metal foil, plastics or the like, with
20 the cells extending transversely to the plane of the panel, and enclosed by opposed skins (21) e.g. of paper, card, plastics or metal foil or sheet. Where the skins are of plastics, they may be reinforced with fibres e.g. of carbon, glass, Kevlar (RTM) or the like in a manner known
25 per se to increase their modulus.

Envisaged skin layer materials and reinforcements thus include carbon, glass, Kevlar (RTM), Nomex (RTM) i.e. aramid etc. fibres in various lays and weaves, as well as

paper, bonded paper laminates, melamine, and various synthetic plastics films of high modulus, such as Mylar (RTM), Kaptan (RTM), polycarbonate, phenolic, polyester or related plastics, and fibre reinforced plastics, etc. and metal sheet or foil. Investigation of the Vectra grade of liquid crystal polymer thermoplastics shows that they may be useful for the injection moulding of ultra thin skins or shells of smaller size, say up to around 30cm diameter. This material self forms an orientated crystal structure in the direction of injection, a preferred orientation for the good propagation of treble energy from the driving point to the panel perimeter.

Additional such moulding for this and other thermoplastics allows for the mould tooling to carry location and registration features such as grooves or rings for the accurate location of transducer parts e.g. the motor coil, and the magnet suspension. Additional with some weaker core materials it is calculated that it would be advantageous to increase the skin thickness locally e.g. in an area or annulus up to 150% of the transducer diameter, to reinforce that area and beneficially couple vibration energy into the panel. High frequency response will be improved with the softer foam materials by this means.

Envisaged core layer materials include fabricated honeycombs or corrugations of aluminium alloy sheet or foil, or Kevlar (RTM), Nomex (RTM), plain or bonded papers, and various synthetic plastics films, as well as expanded

or foamed plastics or pulp materials, even aerogel metals if of suitably low density. Some suitable core layer materials effectively exhibit usable self-skinning in their manufacture and/or otherwise have enough inherent stiffness
5 for use without lamination between skin layers. A high performance cellular core material is known under the trade name 'Rohacell' which may be suitable as a radiator panel and which is without skins. In practical terms, the aim is for an overall lightness and stiffness suited to a
10 particular purpose, specifically including optimising contributions from core and skin layers and transitions between them.

Several of the preferred formulations for the panel employ metal and metal alloy skins, or alternatively a
15 carbon fibre reinforcement. Both of these, and also designs with an alloy Aerogel or metal honeycomb core, will have substantial radio frequency screening properties which should be important in several EMC applications. Conventional panel or cone type speakers have no inherent
20 EMC screening capability.

In addition the preferred form of piezo and electro dynamic transducers have negligible electromagnetic radiation or stray magnet fields. Conventional speakers have a large magnetic field, up to 1 metre distant unless
25 specific compensation counter measures are taken.

Where it is important to maintain the screening in an application, electrical connection can be made to the conductive parts of an appropriate DML panel or an

electrically conductive foam or similar interface may be used for the edge mounting.

The suspension (3) may damp the edges of the panel (2) to prevent excessive edge movement of the panel. 5 Additionally or alternatively, further damping may be applied, e.g. as patches, bonded to the panel in selected positions to damp excessive movement to distribute resonance equally over the panel. The patches may be of bitumen-based material, as commonly used in conventional 10 loudspeaker enclosures or may be of a resilient or rigid polymeric sheet material. Some materials, notably paper and card, and some cores may be self-damping. Where desired, the damping may be increased in the construction of the panels by employing resiliently setting, rather than 15 rigid setting adhesives.

Effective said selective damping includes specific application to the panel including its sheet material of means permanently associated therewith. Edges and corners can be particularly significant for dominant and less 20 dispersed low frequency vibration modes of panels hereof. Edge-wise fixing of damping means can usefully lead to a panel with its said sheet material fully framed, though their corners can often be relatively free, say for desired extension to lower frequency operation. Attachment can be 25 by adhesive or self-adhesive materials. Other forms of useful damping, particularly in terms of more subtle effects and/or mid- and higher frequencies can be by way of suitable mass or masses affixed to the sheet material at

predetermined effective medial localised positions of said area.

An acoustic panel as described above is bi-directional. The sound energy from the back is not
5 strongly phase related to that from the front. Consequently there is the benefit of overall summation of acoustic power in the room, sound energy of uniform frequency distribution, reduced reflective and standing wave effects and with the advantage of superior
10 reproduction of the natural space and ambience in the reproduced sound recordings.

While the radiation from the acoustic panel is largely non-directional, the percentage of phase related information increases off axis. For improved focus for the
15 phantom stereo image, placement of the speakers, like pictures, at the usual standing person height, confers the benefit of a moderate off-axis placement for the normally seated listener optimising the stereo effect. Likewise the triangular left/right geometry with respect to the listener
20 provides a further angular component. Good stereo is thus obtainable.

There is a further advantage for a group of listeners compared with conventional speaker reproduction. The intrinsically dispersed nature of acoustic panel sound
25 radiation gives it a sound volume which does not obey the inverse square law for distance for an equivalent point source. Because the intensity fall-off with distance is much less than predicted by inverse square law then

consequently for off-centre and poorly placed listeners the intensity field for the panel speaker promotes a superior stereo effect compared to conventional speakers. This is because the off-centre placed listener does not suffer the
5 doubled problem due to proximity to the nearer speaker; firstly the excessive increase in loudness from the nearer speaker, and then the corresponding decrease in loudness from the further loudspeaker.

There is also the advantage of a flat, lightweight
10 panel-form speaker, visually attractive, of good sound quality and requiring only one transducer and no crossover for a full range sound from each panel diaphragm.

Figure 3 illustrates a first embodiment of distributed mode panel-form loudspeaker (81) generally of the kind
15 shown in Figures 1 and 2 and in which the frame (1) is replaced by a baffle-board (6), e.g. of medium density fibreboard, having a rectangular aperture (82) in which a distributed mode radiator panel (2) is mounted with the interposition of a resilient suspension (3). A transducer
20 (9) of the kind described in our co-pending International application Nos. (our cases P.5683/4/5) of even date herewith is mounted wholly and exclusively on the panel (2) to vibrate the panel to cause it to resonate to produce an acoustic output.

25 Such a baffle may have the effect of augmenting lower frequency response of the loudspeaker.

Figure 4 illustrates a second embodiment of loudspeaker (81) according to the present invention. The

loudspeaker comprises a box-like enclosure (8) having a top (148), a bottom (149), opposed sides (150), a back (151) and a front (152). The front (152) of the enclosure (8) consists of a rigid lightweight distributed mode radiator panel (2) of the kind described with reference to Figures 1 and 2 and comprising a core (22) enclosed by opposed skins (21). The panel (2) is supported in the enclosure (8) by means of a surrounding compliant suspension (17), e.g. a strip of latex rubber. An acoustic absorbing lining may be provided in the enclosure.

A transducer (9) e.g. of the kinds shown in our co-pending International applications Nos. (our cases P.5683/4/5) of even date herewith is mounted wholly and exclusively on the inwardly directed face of the panel (2) in a predetermined location as discussed in our co-pending International application No. (our file P.5711) of even date herewith, to vibrate the panel to cause it to resonate to produce an acoustic output.

The enclosure (8) may be formed with ports (109) e.g. in one side (150), to enhance bass performance of the loudspeaker. In any event, the use of the enclosure (8) will render the loudspeaker uni-directional, which may be desirable in some circumstances.

Figure 5 illustrates a further embodiment of loudspeaker (81) according to the present invention and generally similar to that described above with reference to Figure 4. The loudspeaker comprises a box-like enclosure (8) consisting of a front box portion (52) having an open

back adapted to be mounted on a wall and aligned with a cavity (110) in the wall, e.g. in a stud-work wall, to reduce the depth of the loudspeaker enclosure while providing the benefits of a larger enclosure. The front
5 face (51) of the front box consists of a rigid lightweight distributed mode radiator (2) comprising a core (22) enclosed by opposed skins (21). The panel (2) is supported in the enclosure (8) by means of a surrounding resilient suspension (17), e.g. of rubber latex strip. The
10 loudspeaker is thus generally of the kind described with reference to Figures 1 and 2 above.

A transducer (9), e.g. of the kind described with reference to our co-pending International application Nos. (our cases P.5683/4/5) of even date herewith is mounted
15 wholly and exclusively on the inwardly directed face of the panel (2) in a predetermined location as discussed in our co-pending International application No. (our ref P.5711) to vibrate the panel to cause it to resonate to produce an acoustic output.

20

INDUSTRIAL APPLICABILITY

The loudspeakers of the present invention are relatively simple to make and can be made to have a relatively shallow depth, or apparently shallow depth, in comparison to conventional loudspeakers. The loudspeakers
25 of the present invention have a wide angle of dispersion in comparison to conventional pistonic loudspeakers. Where the radiator panel is made from or is skinned with metal foil or sheet, the loudspeaker can be made to be shielded

against radio-frequency emissions.

CLAIMS

1. A panel-form loudspeaker (81) comprising a resonant distributed mode acoustic radiator (2), and drive means (9) mounted to the radiator to excite distributed mode
5 resonance in the radiator, characterised by a baffle (6,8) surrounding and supporting the radiator.
2. A panel-form loudspeaker according to claim 1, characterised by resilient suspension (3,17) between the radiator (2) and the surround (6,8) to support the radiator
10 in the baffle.
3. A panel-form loudspeaker according to claim 1 or claim 2, characterised in that the resilient suspension (3,17) is of an elastomeric material.
4. A panel-form loudspeaker according to any one of
15 claims 1 to 3, characterised in that the transducer (9) is mounted wholly and exclusively on the radiator (2).
5. A panel-form loudspeaker according to any preceding claim, characterised in that the baffle (8) is formed as an enclosure having an open backed front box portion (52)
20 adapted to be mounted on a wall or the like.
6. A panel-form loudspeaker according to claim 5, characterised in that the front box portion (52) is adapted to be mounted to align with a cavity (110) in the wall.
7. A panel-form loudspeaker according to any preceding
25 claim, characterised in that the radiator (2) comprises a lightweight core (22) separating a pair of high modulus lightweight skins (21).
8. A panel-form loudspeaker according to any preceding

claim, characterised by a subwoofer mounted to the baffle (6,8).

9. A panel-form loudspeaker according to any preceding claim, characterised by a tweeter mounted to the baffle

5 (6,8).

1/5

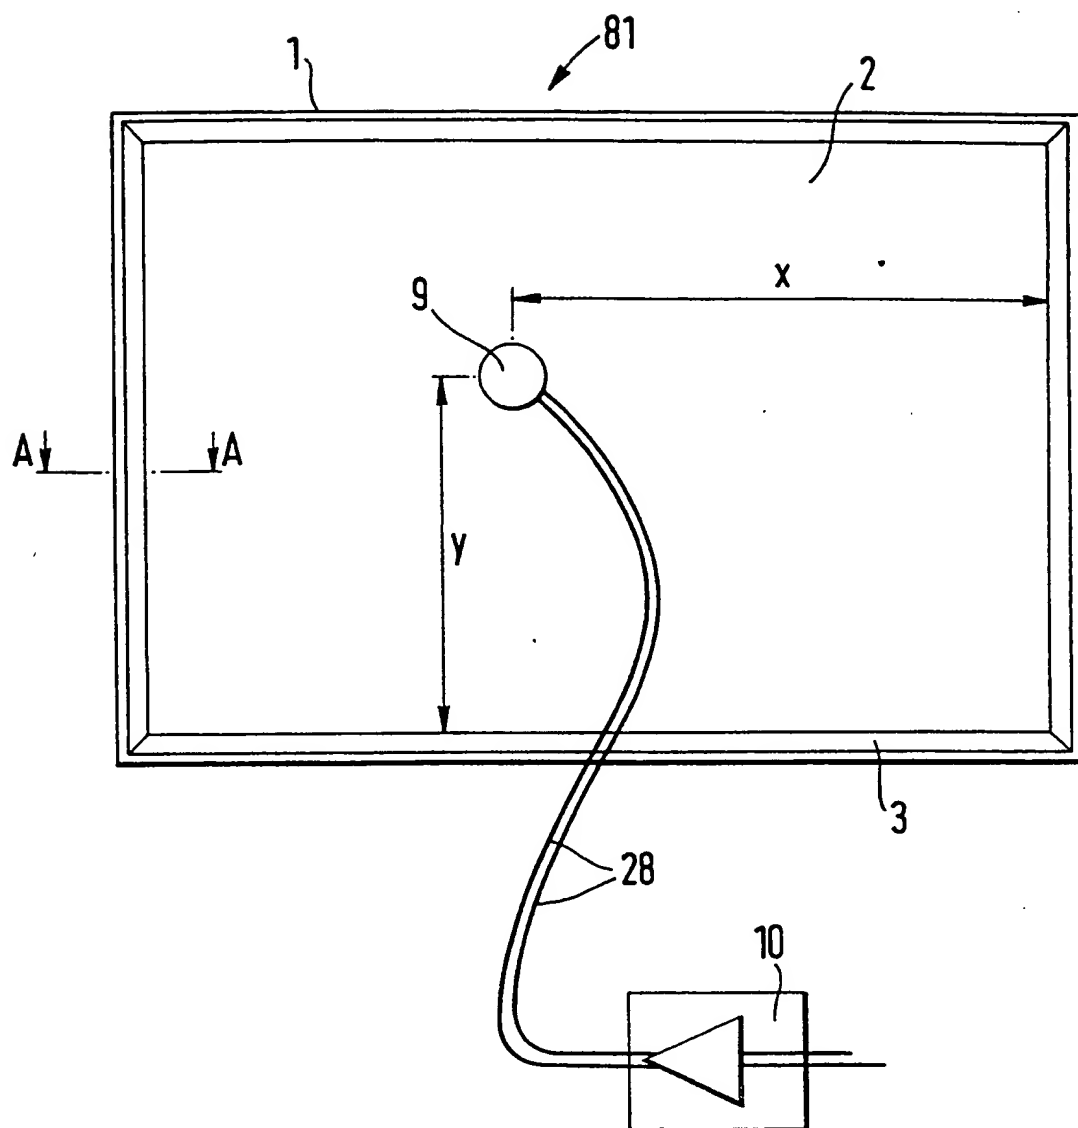


Fig. 1

2/5

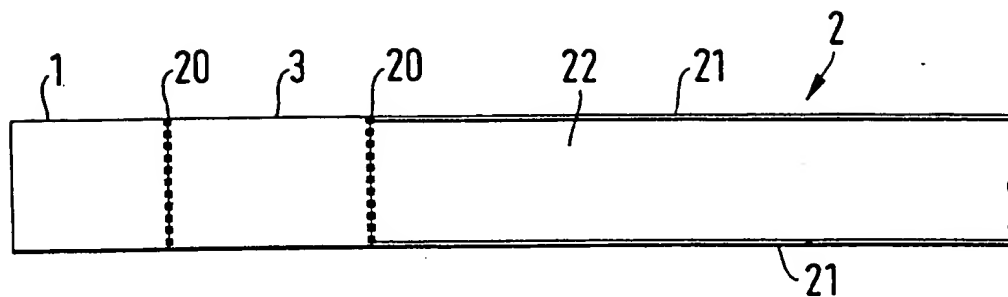


Fig. 2a

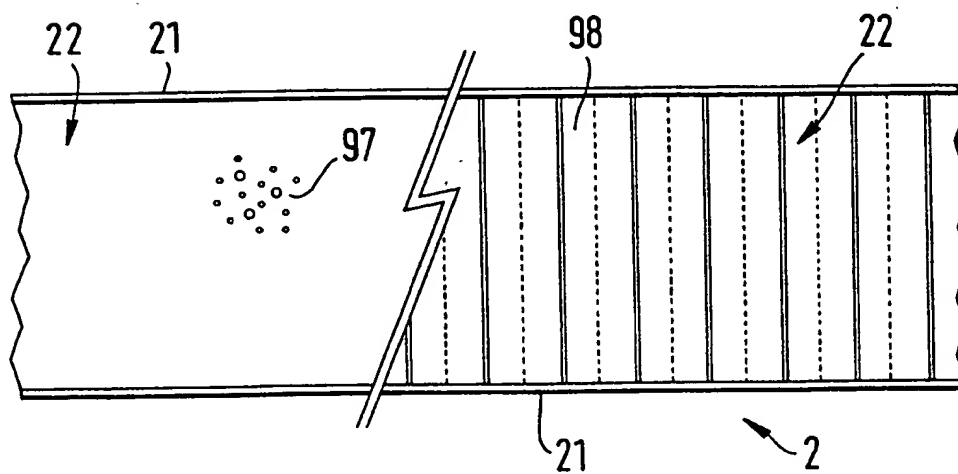


Fig. 2b

3/5

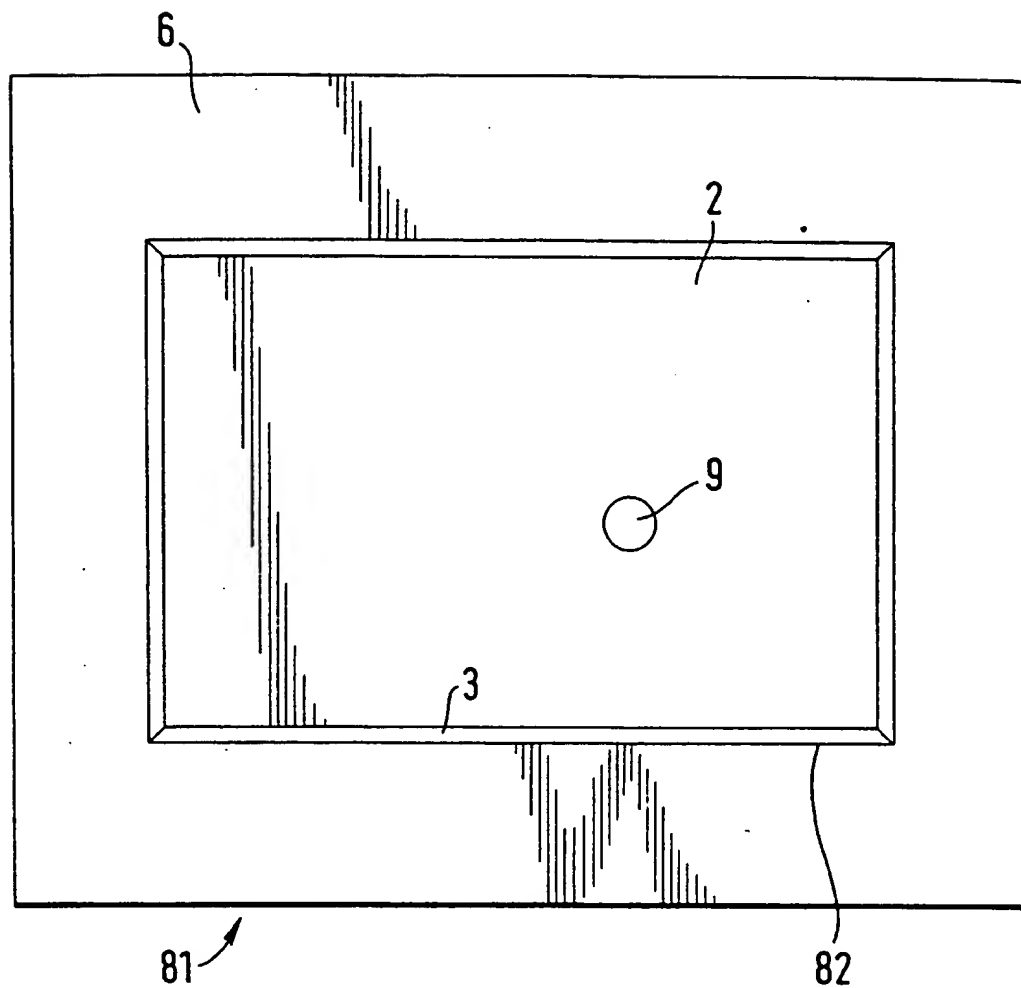


Fig. 3

4/5

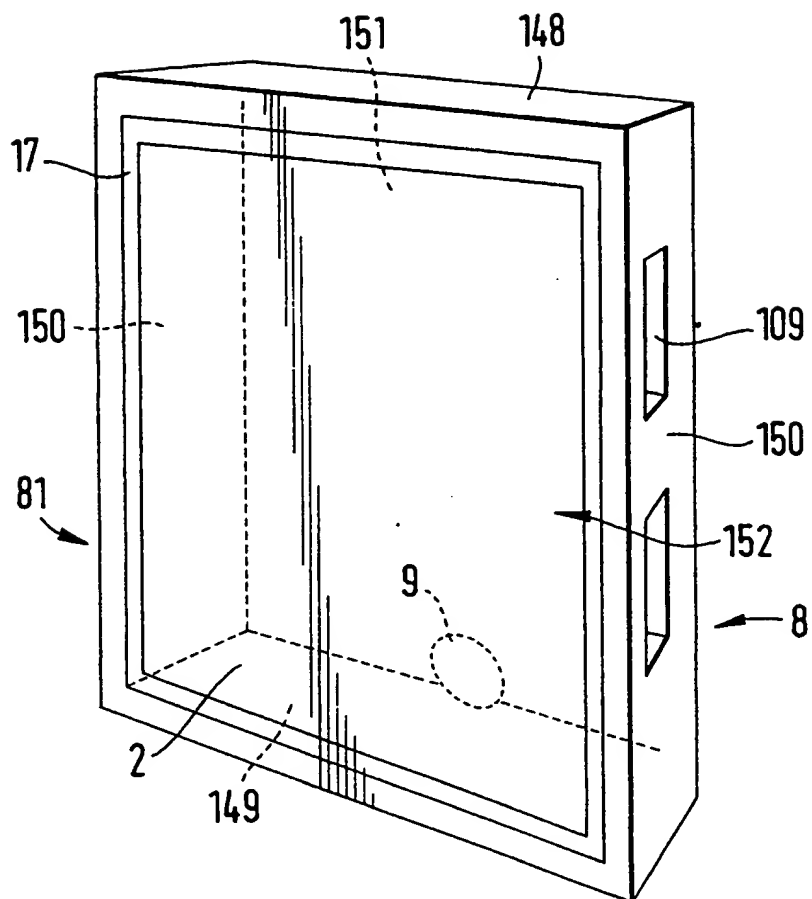


Fig. 4a

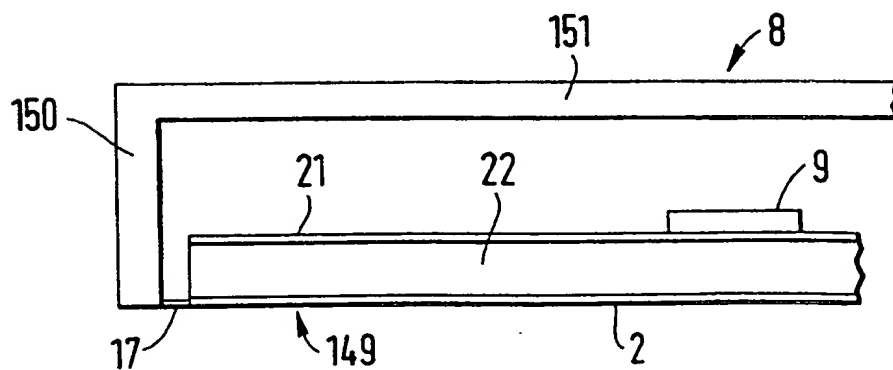


Fig. 4b

5/5

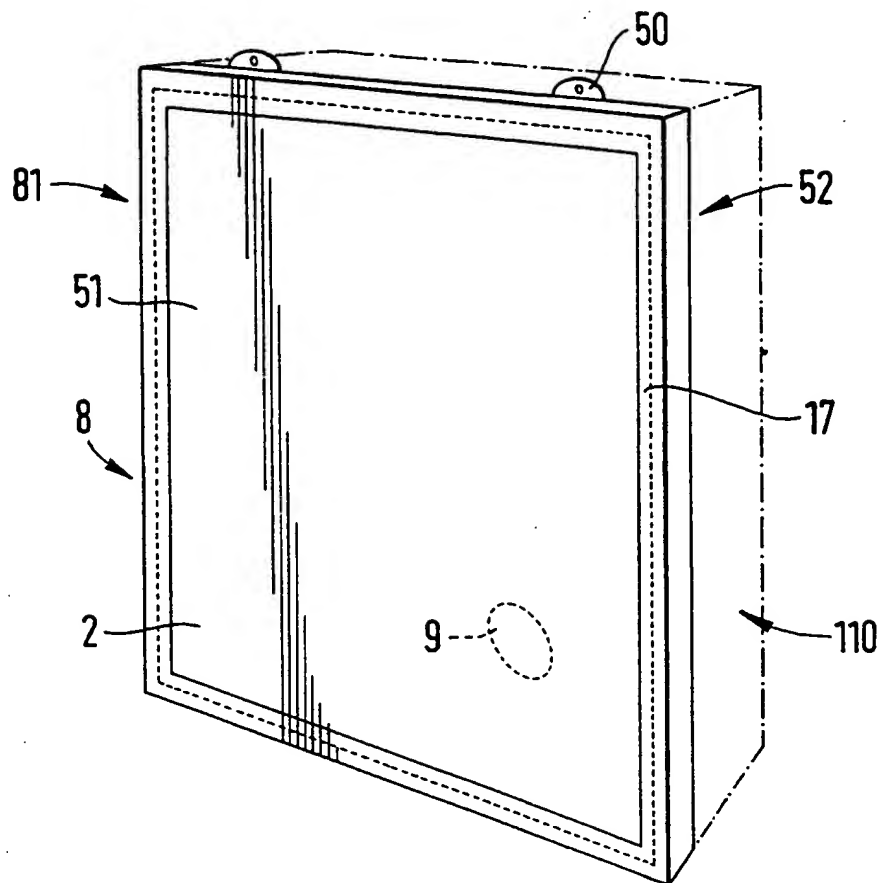


Fig. 5a

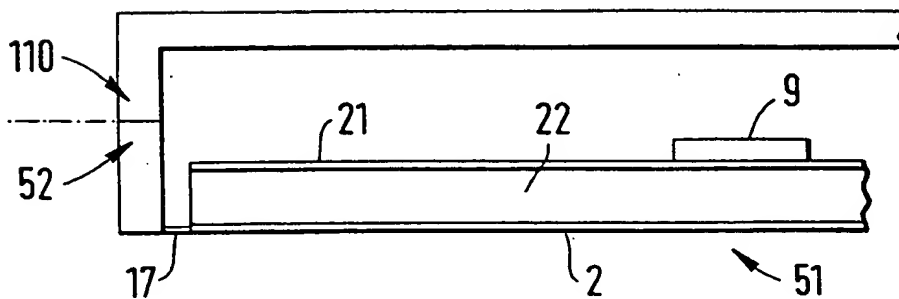


Fig. 5b

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04R 1/02, 7/06		A3	(11) International Publication Number: WO 97/09840
			(43) International Publication Date: 13 March 1997 (13.03.97)
(21) International Application Number: PCT/GB96/02140		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 2 September 1996 (02.09.96)			
(30) Priority Data: 9517918.0 2 September 1995 (02.09.95) GB 9522281.6 31 October 1995 (31.10.95) GB 9606836.6 30 March 1996 (30.03.96) GB			
(71) Applicant (for all designated States except US): VERITY GROUP PLC [GB/GB]; Stonehill, Huntingdon, Cambridgeshire PE18 6ED (GB).		Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(72) Inventors; and (75) Inventors/Applicants (for US only): AZIMA, Henry [CA/GB]; 3 Southacre Close, Chaucer Road, Cambridge CB2 2TT (GB). COLLOMS, Martin [GB/GB]; 22 Burgess Hill, London NW2 2DA (GB). HARRIS, Neil [GB/GB]; 9 Davey Crescent, Great Shelford, Cambridge CB2 5JF (GB).		(88) Date of publication of the international search report: 03 April 1997 (03.04.97)	
(74) Agent: MAGUIRE & CO.; 5 Crown Street, St. Ives, Cambridgeshire PE17 4EB (GB).			

(54) Title: LOUDSPEAKERS COMPRISING PANEL-FORM ACOUSTIC RADIATING ELEMENTS

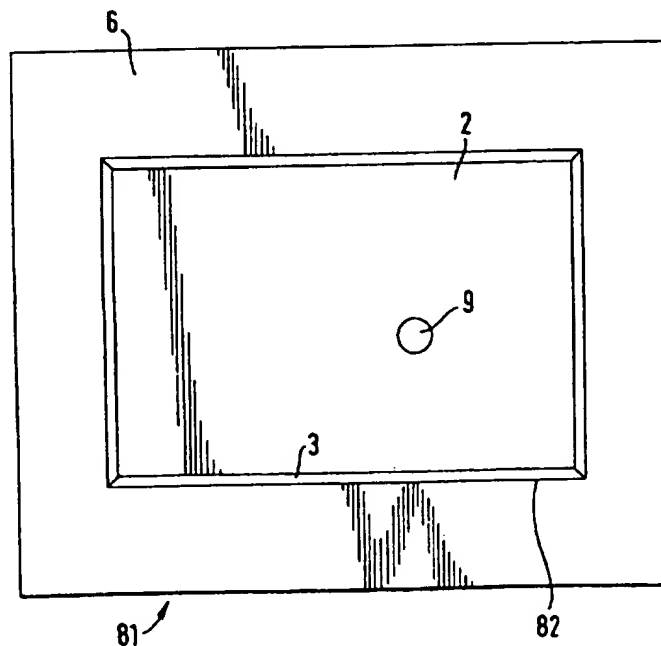

(57) Abstract

A panel-form loudspeaker (81) comprising a resonant distributed mode acoustic radiator (2), and drive means (9) mounted to the radiator to excite multi-mode resonance in the radiator, characterised by a baffle (6, 8) surrounding and supporting the radiator.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

INTERNATIONAL SEARCH REPORT

Int'l Application No
PCT/GB 96/02140

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04R1/02 H04R7/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 3 247 925 A (WARNAKA) 26 April 1966 see column 2, line 55 - column 3, line 38; figures	1,7
A	GB 2 010 637 A (SONY CORP) 27 June 1979 see page 2, line 77 - page 3, line 78; figures	2,3,7
A	US 5 400 407 A (CASSITY ET AL.) 21 March 1995 see column 1, line 16 - column 2, line 47; figures	5,6
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

& document member of the same patent family

Date of the actual completion of the international search

10 February 1997

Date of mailing of the international search report

- 4. 03. 97

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Td. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Gastaldi, G

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 96/02140

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 92 03024 A (SECR DEFENCE BRIT) 20 February 1992 see page 5, line 4 - page 6, line 5; figures	1
A	& GB 2 262 861 A (SECR DEFENSE) 30 June 1993 cited in the application -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 96/02140

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-3247925	26-04-66	GB-A- 1013643	
GB-A-2010637	27-06-79	AT-B- 362000	10-04-81
		CA-A- 1102444	02-06-81
		DE-A- 2850786	18-10-79
		FR-A- 2410410	22-06-79
		NL-A,B,C 7811631	29-05-79
		US-A- 4198550	15-04-80
US-A-5400407	21-03-95	AU-A- 3435493	03-08-93
		CA-A- 2105561	09-07-93
		EP-A- 0576657	05-01-94
		JP-T- 6505854	30-06-94
		WO-A- 9314610	22-07-93
WO-A-9203024	20-02-92	GB-A- 2246684	05-02-92
		AT-T- 117155	15-01-95
		DE-D- 69106712	23-02-95
		DE-T- 69106712	08-06-95
		EP-A- 0541646	19-05-93
		GB-A,B 2262861	30-06-93
		JP-T- 5509211	16-12-93